

SBC7BRSCM2LHD



33.5" x 23.63" x 22.38" (H x W x D)

24" wide commercially approved cold brew/nitro coffee dispenser made in Europe with a twin tap kit to store and serve from two 1/6 kegs; includes adjustable legs and caster set for optional mobility

Highlights:

Made in Europe

Dual tap system lets you serve both regular cold brew and nitro coffee

Designed for recessed installation or portable use with a caster set included

Product Features:

24" Wide Cold Brew/Nitro Coffee Dispenser	Kegerator includes all of the equipment you need to serve cold brew and nitro coffee from two sixtel or Cornelius kegs	
Made in Europe & the USA	Refrigeration unit is constructed in Europe and designed and modified in the USA	
Versatile use	Approved for both residential and commercial settings	
Commercially listed	ETL-S listed to ANSI-NSF Standard 7 for commercial use	
Dispenses both flat and nitro coffee	Unique combination stout and standard tap system allows you to serve both flat iced cold brew and nitro drafts	
Complete dual tap coffee kit	Commercial grade tap kit includes a dual tap stainless steel draft tower, Nitrogen tank, regulator, and connections for ball lock cornelius kegs	
Dual tap system	Twin draft tower allows you to serve from two 1/6 (sixtel) sized kegs	
Slim counter height dimensions for recessed or freestanding use	I Ideal 24" footprint for an easy fit	
Height adjustable	Adjustable legs allow you to set the height anywhere between 33.5" and 34.5" to best fit under your counter	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com






SBC7BRSCM2LHD Specifications:

Overview	
Height of Cabinet	33.5" (85 cm)
Width	23.63" (60 cm)
Depth	22.38" (57 cm)
Depth with Handle	24.0" (61 cm)
Depth with door at 90°	44.25" (112 cm)
Capacity	5.3 cu.ft. (150 L)
Defrost Type	Automatic
Door	Stainless Steel
Cabinet	Black
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	293.0kWh/year
Amps	0.8
Voltage/Frequency	115 V AC/60 Hz
Weight	100.0 lbs. (45 kg)
Shipping Weight	121.0 lbs. (55 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101106267
Kegerator	
Door Swing	LHD
Reversible	No
Height Adjustable	Yes
Tap Kit	Yes
Number of Taps	2
Adjustable Shelves	Yes
Shelf Type	Glass and Scalloped
Shelf Qty	4
Thermostat Type	Dial
Interior Light	Yes
Refrigerant	R600a
Refrigerant Amount	0.64 oz.
Inter Height	27.75" (70 cm)
Interior Width	21.0" (53 cm)
Interior Depth	18.0" (46 cm)

Compressor Step Height	5.5" (14 cm)
Compressor Step Width	21.0" (53 cm)
Compressor Step Depth	6.0" (15 cm)
Level Legs Qty	4
Wheel Qty	4
Temperature Range	36 to 46°F

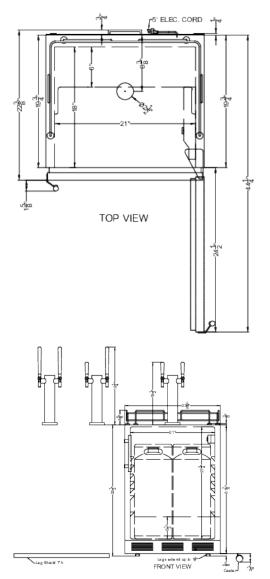

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

